



旭格ADS 70 HD

铝合金门系统 Aluminium Door System

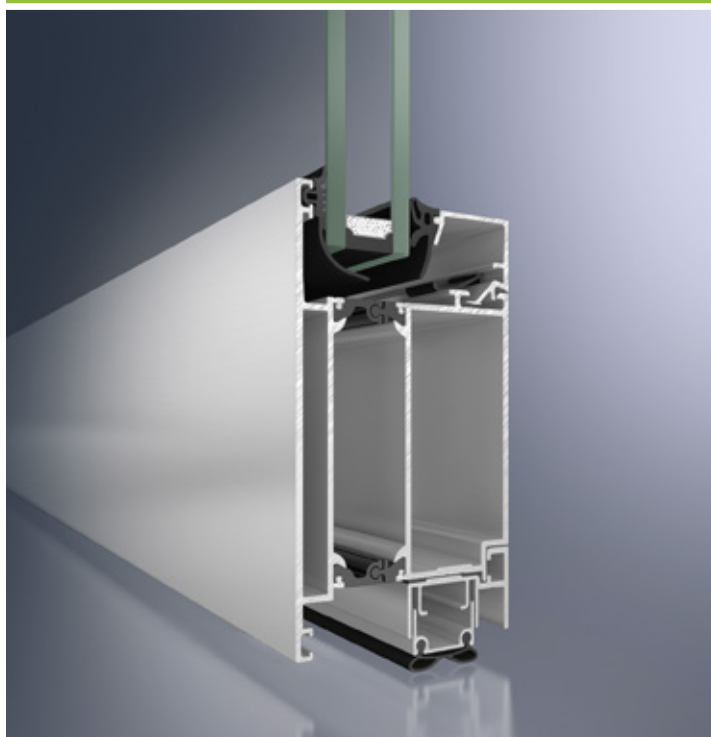

旭格ADS 70 HD (高承重) 门系统以其特殊的规格赋予幕墙独一无二的个性。系统坚固耐用的结构为高频率使用建筑提供极大的开启宽度，净高度可达3,000 mm。系统结构深度为70 mm，提供多种应用可能和设计选择。高品质设计与旭格幕墙系统及窗系统互为协调，提供极佳的组合选项。

The Schüco Door ADS 70 HD (Heavy Duty) gives every façade its own character with its particular dimensions. Its robust and durable construction allows for a large opening width and, with clearance heights of up to 3,000 mm, it is particularly suited to buildings with a high number of visitors. The basic depth of 70 mm offers considerable design freedom and a wide range of options. The high-quality design is suitable for all Schüco façade and window systems with excellent combination options.

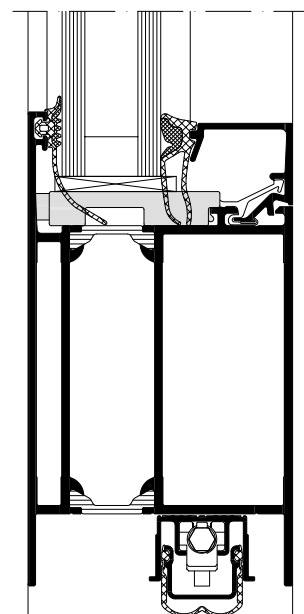

旭格ADS 70 HD门系统，
下框节点，比例 1:2
Schüco Door ADS 70 HD,
Sill, scale 1:2

旭格ADS 70 HD

铝合金门系统

Aluminium Door System



旭格铝合金
门系统ADS 70 HD
Schüco Aluminium
door system ADS 70 HD



旭格ADS 70 HD门系统
Schüco door ADS 70 HD

旭格ADS 70 HD

产品优势

- 防盗等级达到WK3 (RC3)
- 开启宽度达到2.800 mm (双扇)
- 舒适的通过高度
可达3.000 mm
- 最大扇重200 kg
- 可选基座型材或连贯扇型材

Product benefits

- Burglar-resistant up to RC3 (WK3)
- Opening width up to 2,800 mm (double-leaf)
- Generous clearance heights of up to 3,000 mm
- Max. leaf weight 200 kg
- Choice of sill rail profile or continuous leaf profile

加工优势

- 可整合进旭格幕墙系统
- 和旭格AWS窗系统结合使用
- 不同结构深度的系统使用相同部件, 减少系统组件数量, 简化物流和仓储
- 针对个性化需求定制五金件
- 可调节的门槛

Fabrication benefits

- Can be integrated in Schüco Façade Systems
- Use with systems in the Schüco AWS series
- Use of identical components for different basic depth to reduce the number of components and to simplify logistics and storage
- Range of fittings tailored to the individual series
- Adjustable sill

技术数据 Technical data

检测 Test	标准 Standard	值 Value
隔热 Thermal insulation	DIN EN ISO 1077-2	Uf-值 Value W/(m ² K) 最大值 maximally 2,3
防盗 Burglar resistance	DIN EN 1627	RC3 (WK3)
空气渗透性 Air permeability	DIN EN 12207	等级 2 Class 2
防暴雨密封性能 Watertightness	DIN EN 12208	达到等级 5A to Class 5A
防风性 Wind resistance	DIN EN 12210 ¹	达到等级 C3 to Class C3
机械应力 Mechanical loading	DIN EN 13115	达到等级 3 to Class 3

¹ 挠度根据型材而定 The amount of deflection will depend on the profile

旭格国际集团

www.schueco.com.cn

SCHÜCO

香港辦公室

九龍土瓜灣美光街38號安昌大廈地下
G/F, On Cheong Building No.38, Mei Kwong
Street To Kwa Wan Kowloon, Hong Kong
Tel: (852) 2362 7183
Fax: (852) 2334 3525

香港門市

香港灣仔駱克道356號鴻福大廈地下D舖
Flat D, G/F, Hung Fook Mansion,
356 Lockhart Road, Wan Chai HK
Tel: (852) 2802 6678
Fax: (852) 2802 6672