


旭格ASS 50


铝合金推拉和提升推拉系统

Aluminium sliding and lift-and-slide system

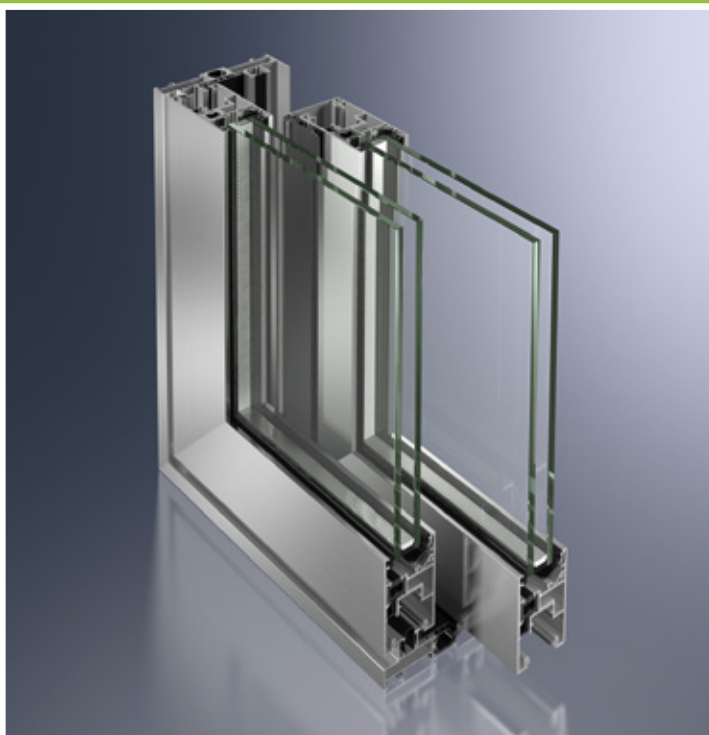

隔热的ASS 50推拉和提升推拉系统提供优质品质，拥有坚固的扇框和纤细的可视面宽度，让室内阳光充溢。可选用全隐藏式旭格e-slide驱动系统，通过按键轻松安全地开启、关闭并锁上落地窗式推拉单元。

The ASS 50 thermally insulated sliding and lift-and-slide system connects the outstanding qualities of a robust vent frame with a narrow face width for rooms flooded with light. The fully concealed Schüco e-slide drive system (optional) opens, closes and locks even floor-to-ceiling units easily and safely at the touch of a button.

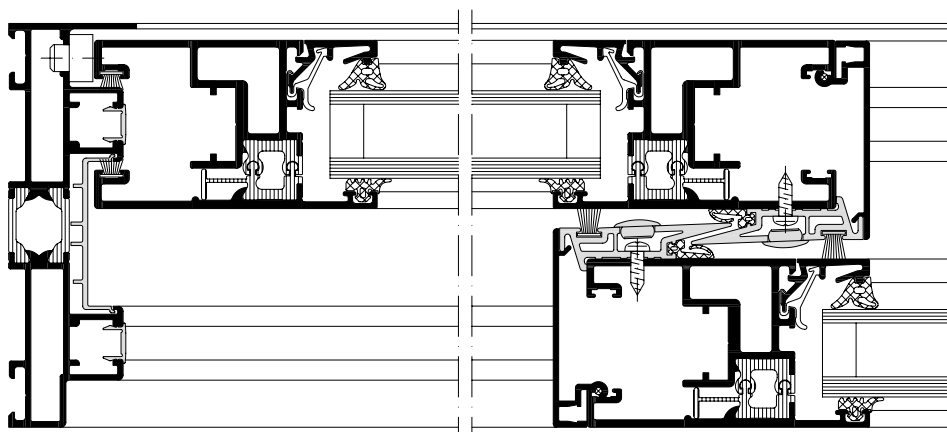


旭格ASS 50推拉系统，比例1:2
Schüco sliding system ASS 50, scale 1:2


旭格ASS 50

铝合金推拉和提升推拉系统

Aluminium sliding and lift-and-slide system

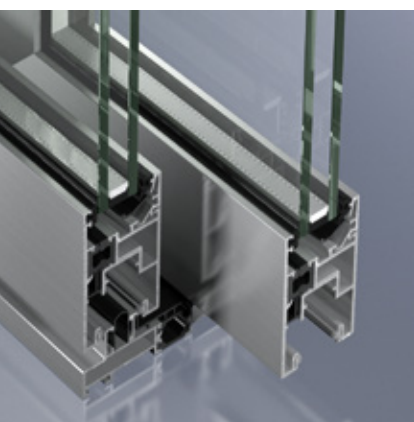

旭格ASS 50推拉系统
Schüco Sliding System ASS 50

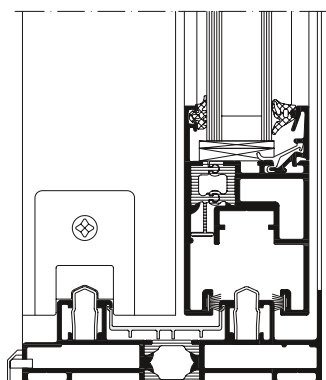

旭格ASS 50推拉系统
比例1:3
Schüco Sliding System ASS 50,
scale 1:3

旭格ASS 50

产品优势

- 水密性达到9A级,符合DIN EN 12208规定
- 提供单轨、双轨和三轨外框多种设计选项
- 隔音标准根据DIN EN ISO 140-3和DIN EN ISO 717-1规定, $R_w \leq 40$ dB
- 玻璃厚度自8至32 mm
- 平整的外框型材作为连贯外框
- 多种颜色 - 内外颜色可不相同

Product benefits

- Watertightness up to class 9A in accordance with DIN EN 12208
- Wide choice due to single, double and triple track outer frames
- Sound insulation in accordance with DIN EN ISO 140-3 and DIN EN ISO 717-1, $R_w \leq 40$ dB
- Glazing thickness 8-32 mm
- Flat outer frame profile as continuous frame
- Wide choice of colours – different inside and outside



加工优势

- 具有高度的灵活性,合作伙伴可自己复合型材
- 可与AWS 50, AWS 60或AWS 65的上亮、侧节点或护栏面板结合使用

Fabrication benefits

- High degree of flexibility due to customers being able to roll their own profiles together
- Can be combined with toplights, side sections or spandrel panels from the Schüco window series AWS 50, AWS 60 or AWS 65

技术数据 Technical data

值 Value

隔热 Thermal insulation	U_w 值自 1,9 W/(m ² K) 起 U_w from 1,9 W/(m ² K)
扇框 - 结构深度 Basic depth of vent frame	50 mm
扇尺寸 (宽x高) Vent size (WxH)	最大 max 3.000 x 3.000 mm
扇重 Vent weight	最重为 max 400 kg
防护等级 Security class	RC 2 (WK2)
滑轨数量 Number of tracks	1-3

旭格国际集团

www.schueco.com.cn

SCHÜCO

香港辦公室

九龍土瓜灣美光街38號安昌大廈地下
G/F, On Cheong Building No.38, Mei Kwong
Street To Kwa Wan Kowloon, Hong Kong
Tel: (852) 2362 7183
Fax: (852) 2334 3525

香港門市

香港灣仔駱克道356號鴻福大廈地下D舖
Flat D, G/F, Hung Fook Mansion,
356 Lockhart Road, Wan Chai HK
Tel: (852) 2802 6678
Fax: (852) 2802 6672